

ELECTRICAL SPECIFICATIONS:

- 1.) FREQUENCY RANGE: 1000 - 2000 MHz
 - 2.) IMPEDANCE: 50 OHMS
 - 3.) INSERTION LOSS (MAX): 0.6 dB (ABOVE 4.77 dB SPLIT)
 - 4.) AMPLITUDE BALANCE (MAX): 0.2 dB
 - 5.) PHASE BALANCE (MAX): 3 DEGREES
 - 6.) ISOLATION (MIN): 22 dB
 - 7.) INPUT VSWR (MAX): 1.20 : 1
 - 8.) OUTPUT VSWR (MAX): 1.25 : 1
- | | DC PASS | DC BLOCK |
|------------------------|---------|----------|
| 9.) DC VOLTAGE (MAX): | 50 V | 15 V |
| 10.) DC CURRENT (MAX): | 1000 mA | 75 mA |

MECHANICAL SPECIFICATIONS:


- 1.) CONNECTORS: TNC FEMALE (JACK), 50 OHM
- 2.) CONNECTOR BODY: BRASS, TRI-ALLOY PLATE
- 3.) CONNECTOR PIN: BERYLLIUM COPPER, GOLD PLATE
- 4.) INSULATOR: PTFE, VIRGIN ELECTRICAL GRADE
- 5.) HOUSING: ALUMINUM, CLEAR CHEM CONVERSION FILM, RoHS COMPLIANT (NO HEX CHROM)
- 6.) SOLDER: LEAD FREE, RoHS COMPLIANT
- 7.) OPERATING TEMP: -65°C TO +85°C
- 8.) WEIGHT: 296 GRAMS

GPS INPUT POWER RATING (GPS DIVIDER SPLITTER):

INTO MATCHED LOAD VSWR's	IN-PHASE	180° OUT-OF-PHASE
1.2 : 1	30 WATTS	30 WATTS
2.0 : 1	30 WATTS	7.5 WATTS
∞	15 WATTS	0.75 WATTS

GPS INPUT POWER RATING (GPS COMBINER):

COHERENT SIGNALS (IN-PHASE)	3 X 10 WATTS
COHERENT SIGNALS (180° OUT-OF-PHASE)	3 X 0.25 WATTS
NON-COHERENT SIGNALS	3 X 0.5 WATTS
OTHER CONDITIONS - CONSULT FACTORY	

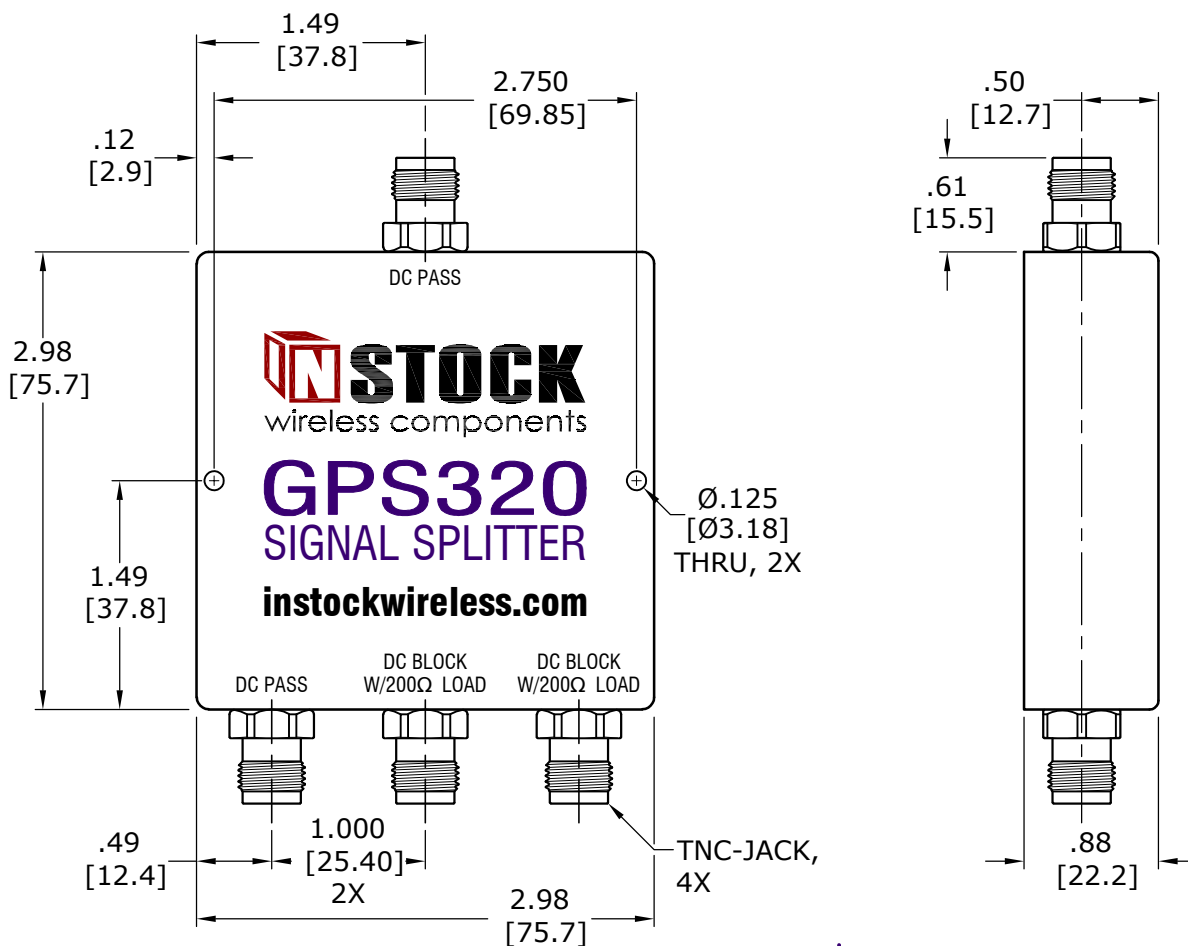

3-way, GPS signal splitter; DC pass 1 port, DC block 2 ports w/200Ω load. Typically used for powering an active antenna thru pass ports while splitting GPS signal 3 ways.

				TOLERANCES			
				INCHES	MILLIMETERS		
				.00 = ±.01	.0 = ±.25		
				.000 = ±.004	.00 = ±.10		
DRAWN: KMG		APPROVED: MJD					
DATE: 10/19/17		DATE: 10/19/17					
REV	DESCRIPTION	BY	DATE			MODEL NO. GPS320	
				TITLE GPS SPLITTER, 3 WAY, TNC FEMALE, 1 - 2 GHz, 30 WATTS, RoHS, DC BLOCK 2 PORTS WITH 200Ω INTERNAL LOAD			
				www.instockwireless.com			